



AM-601

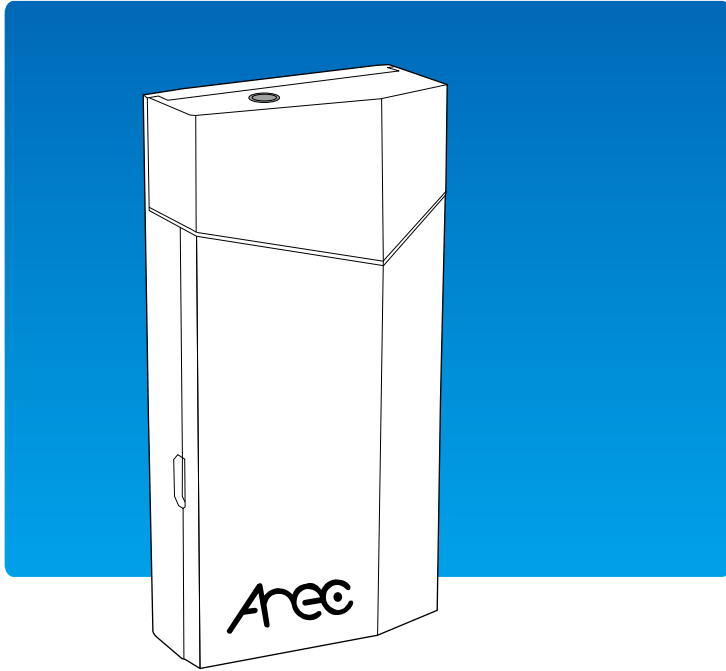

Specifications:

AM-601 Wireless microphone	
Control buttons	Power ON/OFF
	Mute
Power input	Built-in rechargeable lithium battery. 3.7V, 720mA Interface: USB Micro-B
Audio input	Ø3.5 audio input jack Built-in microphone
Working temperature	0°C~50°C
Battery life	Approximate continuous operating time : 4hours
Dimension	83(L) x 41.5(W) x 18.15(H)mm
Weight	67g

Wireless microphone information

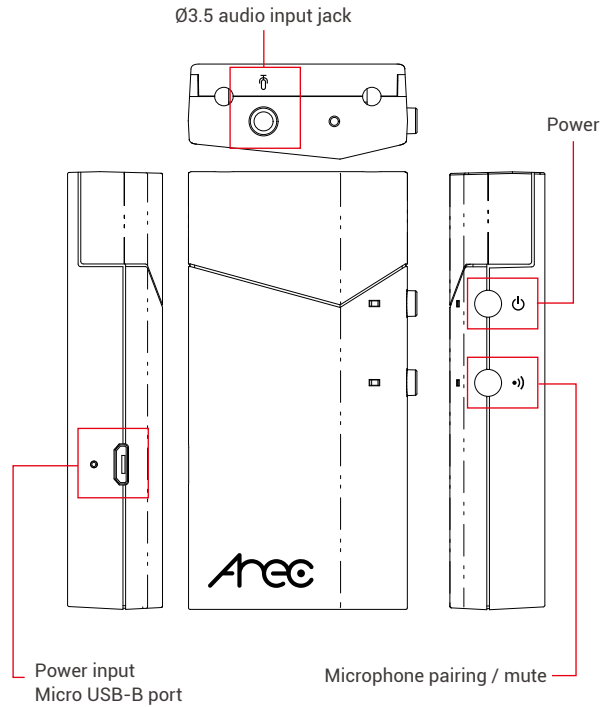

Button and light indicators of wireless microphone:


Interface	Light Color	Status
 Power switch	Green Red	Press and hold the button for 3 seconds to power ON / OFF the wireless microphone . <ul style="list-style-type: none"> • Green light turns on when power is ON. • Red light flashes when power is low.
 Wireless microphone pairing and mute button	Blue Red	Press and hold the button for 3 seconds to pair the wireless microphone with AREC Media Station*. <ul style="list-style-type: none"> • Blue light flashes fast during pairing. • Blue light flashes slow after it is successfully paired and connected. Press the button twice to mute/unmute the wireless microphone. <ul style="list-style-type: none"> • Red light is on, when it is muted. Note: The wireless microphone memorizes the latest pairing result. To clear the pairing, press and hold the button for more than 10 seconds.
Micro USB port	Green	Green light is on during power charging. Light goes off when the charging is complete.
 Ø3.5 audio jack for microphone input		For external microphone

* Models with a wireless audio receiver.

規格表：

AM-601 無線麥克風	
功能按鈕	電源開關
	停止收音按鈕
電源輸入介面	內建可充電式鋰電池 3.7V，720mA 接口：USB Micro-B
音源輸入介面	Φ3.5 音源輸入孔 內建麥克風
工作溫度	0°C~50°C
耗電量參考值	四小時
尺寸	83.0(長) x 41.5(寬) x 18.15(高)毫米
重量	67公克

概觀

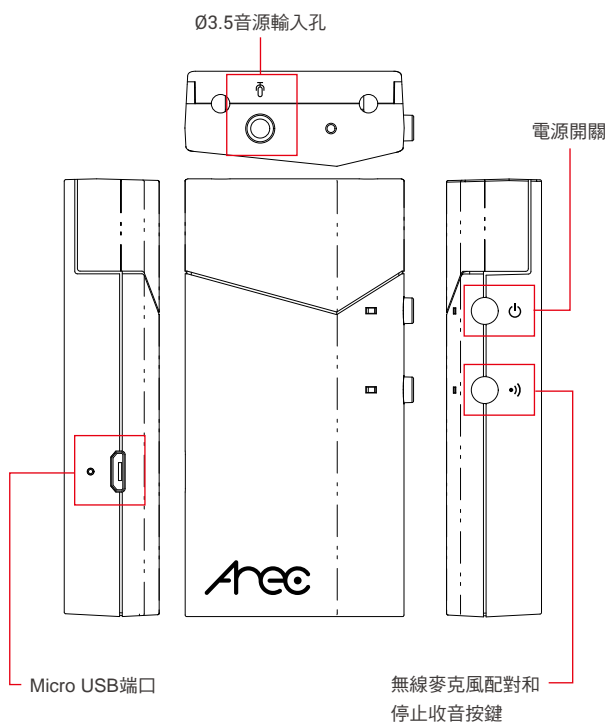

介面與指示燈號狀態說明


介面	燈號	狀態說明
電源開關	綠紅雙色燈	按住按鈕3秒鐘以開啟/關閉無線麥克風。 • 開機狀態 綠燈亮 • 電量不足時 紅燈閃爍
無線麥克風配對和停止收音按鈕	藍紅雙色燈	按住按鈕3秒鐘，以配對AM-601無線麥克風與AREC智慧錄播站*。 • 配對時藍燈快閃 • 配對成功與連接後藍燈慢閃 按兩下該按鈕以靜音/取消靜音 無線麥克風。 • 靜音狀態紅燈亮 註：無線麥克風會記憶最近的配對結果。 若要清除配對，請按住按鈕 10 秒以上。
Micro USB端口	綠燈	充電時綠燈亮。充電完成燈自動熄滅。
Ø3.5麥克風音源輸入孔		用於外接麥克風

* 須為具備無線麥克風接收器的型號

規格表：

AM-601 无线麦克风	
功能按钮	电源开关
	停止收音按钮
电源输入接口	内建可充电式锂电池 3.7V，720mA 接口：USB Micro-B
音源输入接口	Φ3.5 音源输入孔 内建麦克风
工作温度	0°C~50°C
耗电量参考值	四小时
尺寸	83.0(长) x 41.5(宽) x 18.15(高)毫米
重量	67公克

概觀

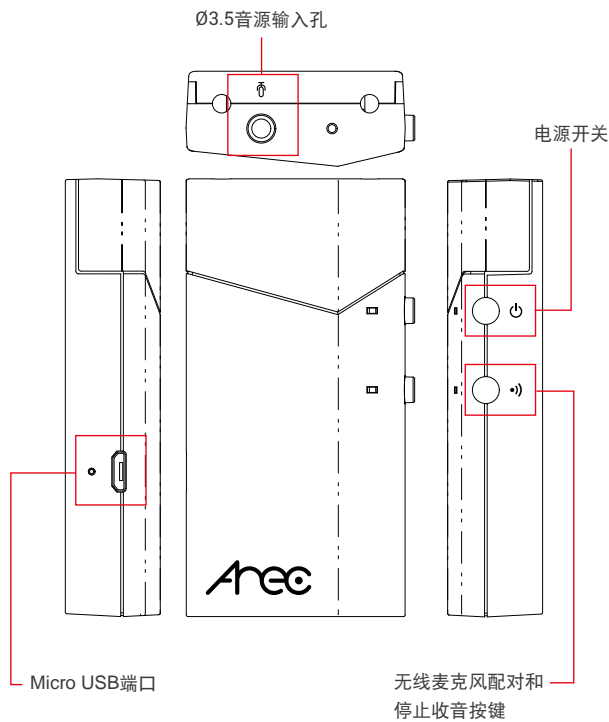

接口与指示灯号状态说明

介面	灯号	状态说明
电源开关	绿红双色灯	按住按钮秒钟，以开启 / 关闭无线麦克风。 • 开机状态 绿灯亮 • 电量不足时 红灯闪烁
无线麦克风采对和停止收音按钮	蓝红双色灯	按住按钮3秒钟，以配對AM-601无线麦克风与爱录客智能录播一体机*。 • 配對時藍燈快閃 • 配對成功與連接後藍燈慢閃 双击该按钮以静音/取消静音 无线麦克风。 • 静音状态红灯亮 註：无线麦克风会记忆最近的配對結果。 若要清除配對，請按住按钮10秒以上。
Micro USB端口	绿灯	充電時綠燈亮。充電完成燈自動熄滅。
Ø3.5麥克風音源輸入孔		用於外接麥克風

* 須為具備无线麥克風接收器的型號